


DATE ISSUED: JUNE 24, 1997

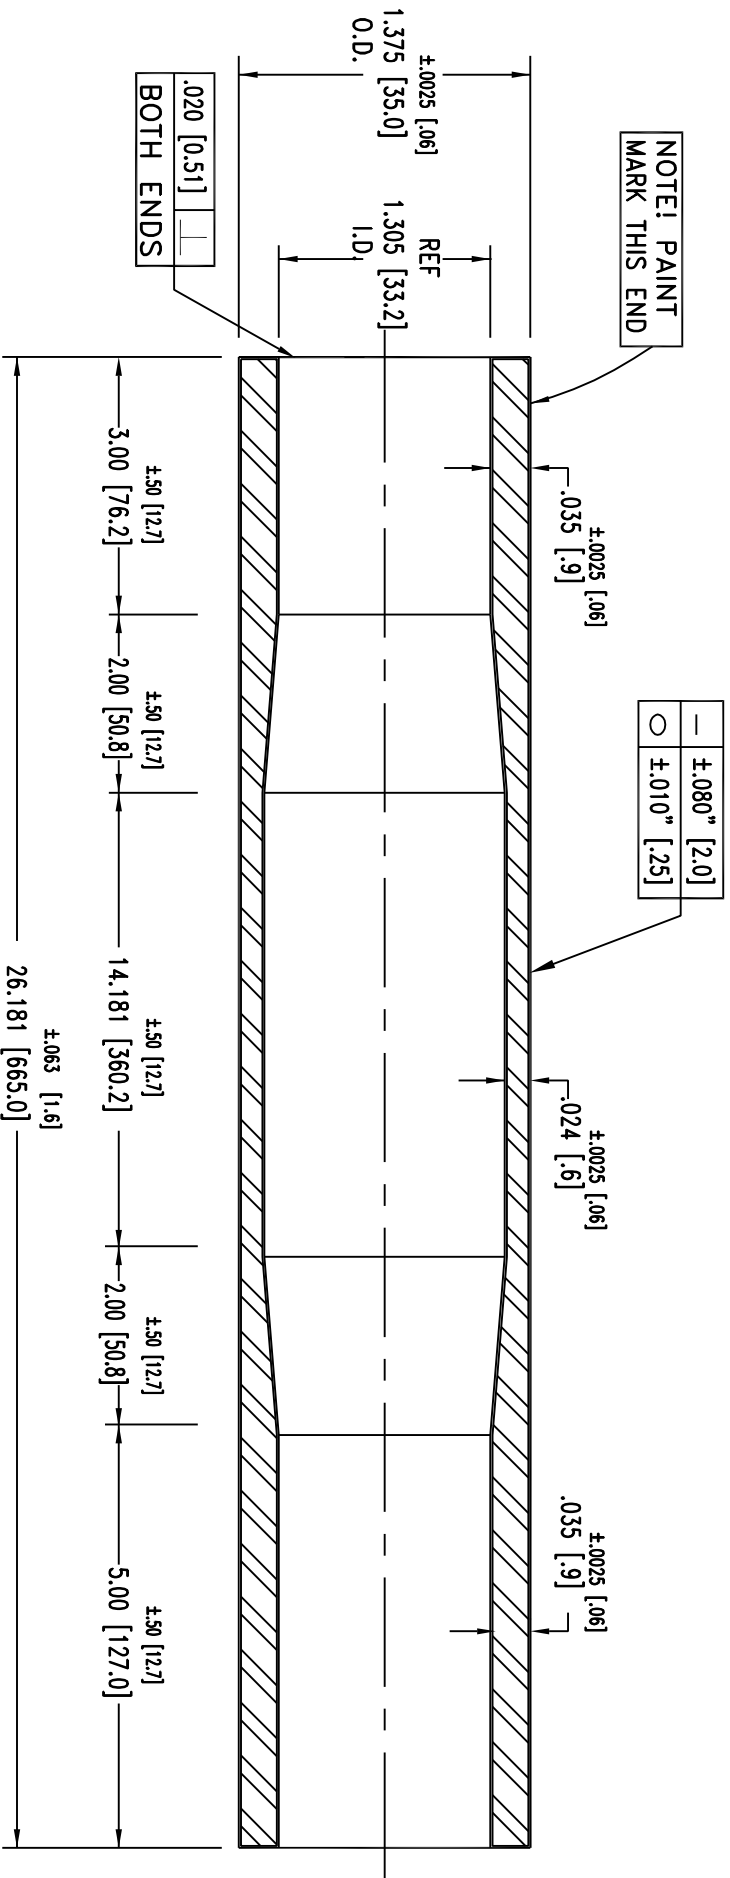

NOTES:

1. HARDNESS: 90HRB MIN., 105 HRB MAX.
2. SURFACE FINISH: 55 MICRO-INCH MIN., 60 MICOR-INCH MAX.
3. RUST PROTECTION: TRUE TEMPER STANDARD LIGHT OIL
4. SEAM SOUNDNESS TEST: TRUE TEMPER STANDARD METHOD
5. BOW: TOTAL BOW MAY NOT EXCEED .080 TOTAL INDICATOR READING WITH THE ENDS OF TUBE SUPPORTED.

PRODUCT CODE: OX2DT665

TRUE TEMPER DOWN TUBE

PROJECT: S17062 COST CODE: S17062

MATERIAL 4130 ALLOY

POLISHED

STRESS RELIEVED

THIS DOCUMENT IS THE PROPERTY OF TRUE TEMPER SPORTS. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO TRUE TEMPER SPORTS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED OR PUBLISHED WITHOUT TRUE TEMPER SPORTS' PRIOR WRITTEN CONSENT.

| | | | | |
|-----|-------------|----|------|----------|
| LET | CHANGE DATA | BY | DATE | APPROVED |
| | | | | |

| | | | |
|--------------------|-----------------------|---------------------------------------|--------------|
| TRUE TEMPER | | POST OFFICE DRAWER E AMORY, MS. 38821 | |
| TITLE: | TRUE TEMPER DOWN TUBE | CC: | S17062 |
| DRAWN BY: | A. RANDOLPH | SCALE: | NONE |
| CHECKED: | | REPLACES: | |
| APPROVED: | P. KNOX | REPLACED BY: | |
| DATE: | 6/23/97 | TELEPHONE: | 601-256-5606 |
| | | NUMBER: | AST-12-97 |
| | | CHG. LET.: | |