


±.063  
17.750  
**BLANK**

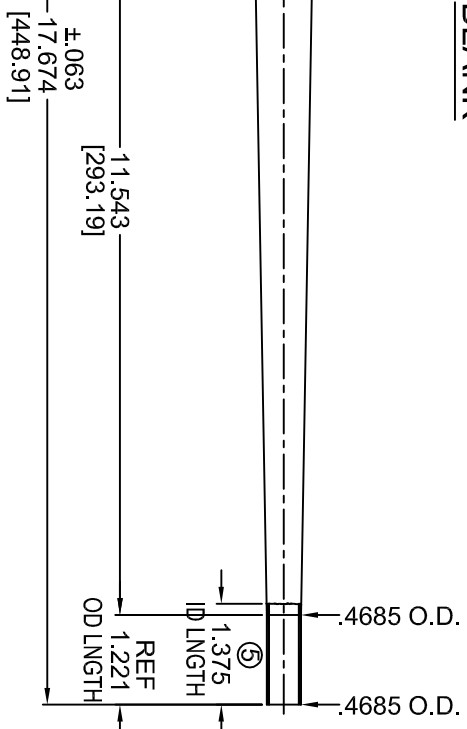

**NOTES**

- 9 SHIPPING PACKAGE: PBST30
- 8 SURFACE COATING: PACK IN OIL
- 7 SURFACE FINISH: POLISH
- 6 STRESS RELIEVE
- 5 .300 MIN ID FOR 1.375 INCHES.
- 4 SQUARE BOTH ENDS WITHIN .020 C AXIS
- 3 HARDNESS: Rb 90-105
- 2 MATERIAL: 4130 SEAMLESS
- 1 PART MADE TO TRUE TEMPER PROCEDURE AND TESTS STANDARDS.

**BLANK DEFINITION**

RC2CSBLANK 4130S07920 4130 SEAMLESS

REV	CHANGE	BY	DATE
B	ECR 09039 FROM WELDED TO SEAMLESS	AR	8/6/10
A	ADD METRIC DIMENSIONS & WEIGHT	PK	8/4/93
-	INITIAL PRODUCTION RELEASE	RAWS	7/1/90

**TRUE TEMPER**  
8275 TOURNAMENT DRIVE  
SUITE 200  
MEMPHIS, TN 38125 (901) 746-2000

DRAWN BY: A. RANDOLPH CORPORATE: B. HOUGH MFG. ENGINEERING:	DESIGNATION: <b>TRUE TEMPER SWAGED CHAIN STAY</b>
PLANT MANAGEMENT:	PART FAMILY: <b>RC2CS</b>
QUALITY ASSURANCE:	REF. DRAWING NUMBER: <b>505-90-76-1</b>
DATE: 7/1/90	TOLERANCES (EXCEPT AS NOTED): DECIMAL X +/- 0.125 XX +/- 0.063 XXX +/- 0.002
SCALE: NONE	REVISION: <b>B</b>
ECR NUMBER: <b>09039</b>	STEP LOCATION (FROM TIP): +/- 0.063 (NON ACCUMULATIVE)
SIZESHEET: A/1	

THIS DOCUMENT IS THE PROPERTY OF TRUE TEMPER SPORTS. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO TRUE TEMPER SPORTS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON OR COPIED, OR PUBLISHED WITHOUT TRUE TEMPER SPORTS PRIOR WRITTEN CONSENT.